

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2006		2. REPORT TYPE		3. DATES COVERED 00-00-2006 to 00-00-2006	
4. TITLE AND SUBTITLE Acoustics Propagation Through Surface Ship Wakes				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, 4555 Overlook Avenue SW, Washington, DC, 20375				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Acoustic Propagation Through Surface Ship Wakes

S. Stanic,¹ T. Ruppel,¹ and R. Goodman²

¹Acoustics Division

²University of Southern Mississippi

Introduction: A ship's wake is a mixture of bubbles and turbulent seawater generated by a ship's hull and its cavitating propellers. These bubble clouds are a common feature of all ship wakes, and the entrapped air bubbles are responsible for the lingering acoustic signatures of a ship's wake. It is well known that bubbles, even in small amounts, cause considerable frequency-dependent changes in the speed of sound and absorption. These bubble-cloud characteristics are driven by the type of ship, its speed, and local oceanographic conditions.

As the wake ages, it goes from a violent breakup and mixing of bubbles due to turbulence to one where, as the turbulence decays, the bubbles begin to rise toward the surface due to their buoyancy and the changes in the buoyancy of the water mass. It is clear that since bubbles of different sizes rise at different rates, as the wake ages, the horizontal and vertical distributions of bubble densities result in changes to both sound-speed profiles and absorption within the wake. These frequency-dependent sound-speed profiles have dramatic effects on propagating acoustic signals.

Field Measurements: A series of across-the-wake acoustic absorption measurements were taken in the summer of 2004. A 10-meter-long, 8-element receiving array and broadband source were towed by separate ships on either side of a wake generated by a

small Naval vessel traveling at 15 kt. The vessel, a YDT, was provided by NAVDIVESALVTRACEN Panama City, Florida. The YDT is 131 ft long, 26.6 ft wide, has a draft of 4.95 ft, and displaces 173 light tons.

Figure 10 shows the source-receiver measurement configuration and the receiving array tow ship. The wake width is approximately 10 m and the distance between the measurement systems is 150 m. This range is monitored by a laser system and recorded. The measurement systems are towed at a speed of 4.5 kt. The signal repetition rate of 1 s gave an across-the-wake absorption measurement every 7.5 m.

Figure 11 shows the average acoustic absorption across the wake for a number of frequencies as a function of distance from the time the measurement sequence began. The maximum absorption clearly occurs at a range of about 500 m after the start of the measurement sequence. This was the most intense part of the wake that occurred about 20 m behind the YDT. The average across-the-wake absorption levels returned to the nonbubble background levels at a distance of about 2 km. In these measurements, the maximum absorption occurs at a frequency of 100 kHz, suggesting a large number of 30- μ m-diameter bubbles in that part of the wake.

From the absorption measurements, the void fractions and the sound velocities were calculated for a 10-m deep wake. Figure 12(a) shows the frequency-dependent sound velocity profiles at 5, 20, 60, and 120 kHz that were derived from the absorption measurements and a simple model for the vertical dependence of the bubble densities.

Figure 12(b) shows the ray plots for a source located at a depth of 10 m, which is near the lower portion of the wake. These ray plots clearly show the

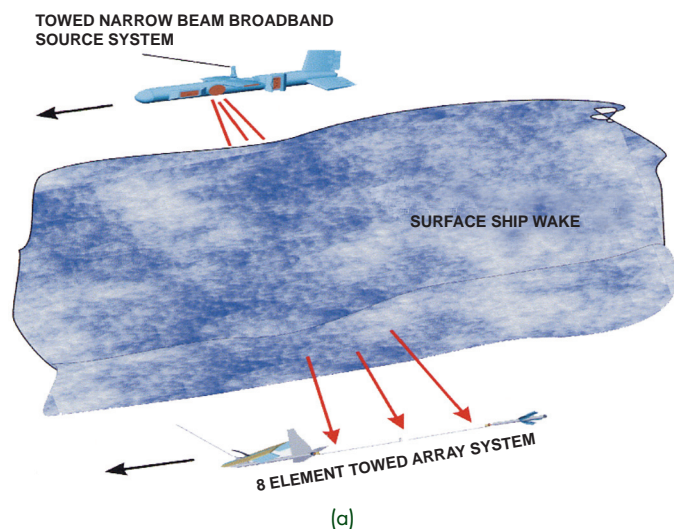


FIGURE 10

(a) Measurement configuration and (b) generated wake and array tow ship.



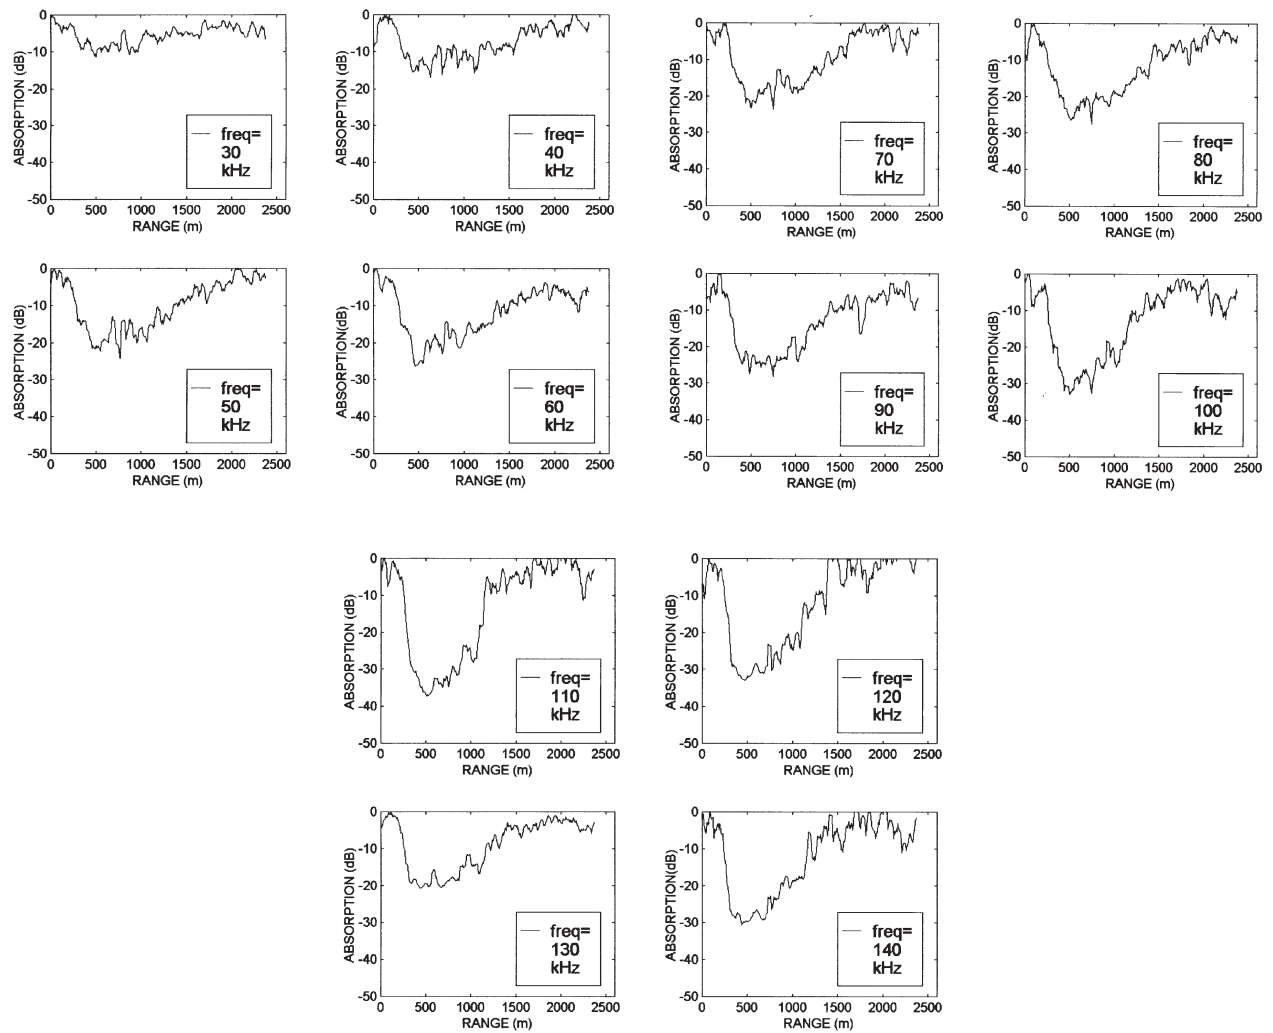


FIGURE 11
Average signal absorption as a function of range and frequency.

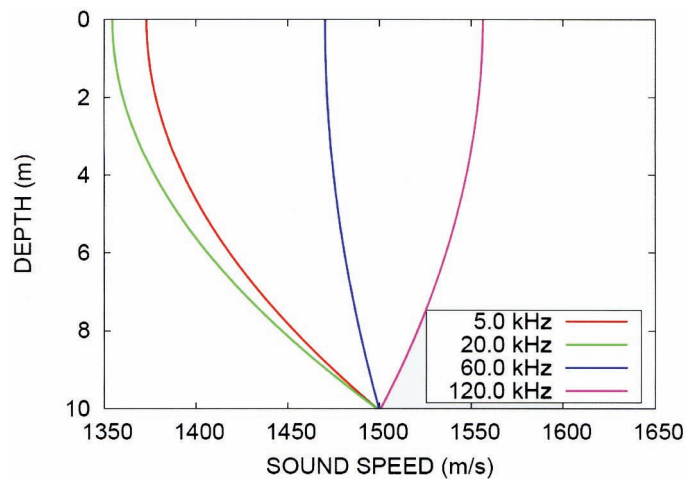

(a)

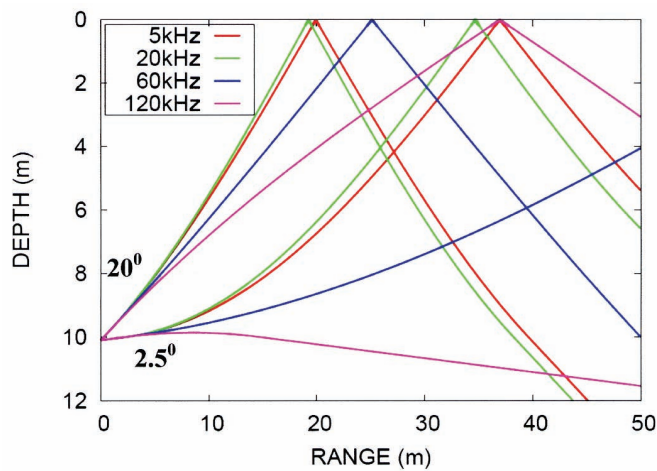

(b)

FIGURE 12

(a) Calculated frequency-dependent sound velocity profiles. (b) Ray paths corresponding to the different sound velocity profiles at launch angles of 2.5° and 20°.

dispersive effects of the sound velocity profiles. For launch angles of 2.5° and 20°, and at frequencies of 5, 20, and 60 kHz, the acoustic conditions are clearly upward-refracting, while at a frequency of 120 kHz, the conditions are downward-refracting.

Summary and Impact: NRL has developed a method for providing valuable data and performance

estimates for target detections in and below a surface ship wake. The varying vertical and horizontal distribution of bubbles and the corresponding fluctuating absorptions provide insight into target detections in and below a surface ship wake.

[Sponsored by ONR]

